



FLC121 [M]/[VN]

- Accent floodlights
- Medium and very narrow beam distribution, symmetrical
- Integral electronic control gear
- T4 halogen, 50 watt 12 volt
- CMH 20 - 35 watt

IP66. Marine grade die-cast aluminum construction with 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Clear tempered glass lens. Anodized aluminum reflector.

Integral electronic transformer, 120 volt - 12 volt.

Integral electronic MH ballast in 120 volt ONLY.

Luminaire is designed to mount over a std. 4" recessed junction box.

Standard finish: Black RAL 9004 powder coat with fine texture. Optional finishes: White RAL 9016, or Grey Metallic RAL 9007.

UL, ULc listed. Suitable for Wet locations.



RAIL66 302 - 305




RECESSED WALL LUMINAIRES 90





MOUNTING ACCESSORIES 360




OPTICAL ACCESSORIES 362

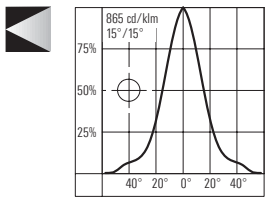


665-0310 [ET]
 FLC121, version #3 [M]
 50T40/ CL/ AX/
 GY 6.35 base - 12 volt
 900 lm
 Weight 4.0 lbs.

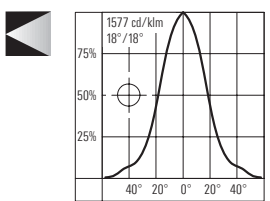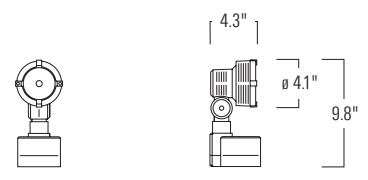


665-0351 [ECG]
 FLC121, version #3 [M]
 CMH20/TM BT-5/
 PGJ5 base
 1625 lm
 Weight 4.0 lbs.




FLC121, version #3
 as shown, but fitted
 with an additional
 IO linear spread lens




FLC121 Version #3

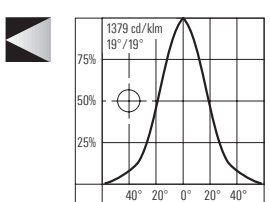



665-0352 [ECG]
 FLC121, version #3 [M]
 CMH35/TM BT-5/
 PGJ5 base
 3300 lm
 Weight 4.0 lbs.




FLC121, version #3
 as shown, but fitted
 with an additional
 IO linear spread lens

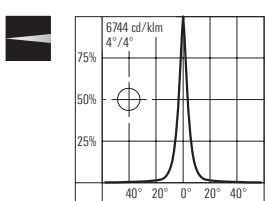


665-0110 [ET]
 FLC121, version #3 [VN]
 50T40/ CL/ AX/
 GY 6.35 base - 12 volt
 900 lm
 Weight 4.0 lbs.

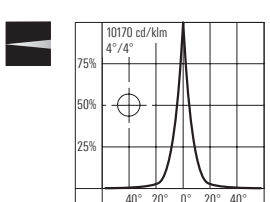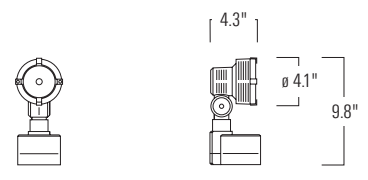


665-0151 [ECG]
 FLC121, version #3 [VN]
 CMH20/TM BT-5/
 PGJ5 base
 1625 lm
 Weight 4.0 lbs.




FLC121, version #3
 as shown, but fitted
 with an additional
 IO linear spread lens



FLC121 Version #3

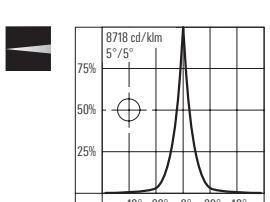

665-0152 [ECG]
 FLC121, version #3 [VN]
 CMH35/TM BT-5/
 PGJ5 base
 3300 lm
 Weight 4.0 lbs.



FLC121, version #3
 as shown, but fitted
 with an additional
 IO linear spread lens

Ordering guide:

Specify 7 digit code along voltage and finish.
 Example: **665-0152 - 120 volt - Black RAL 9004**

NOTE: 120 Volt supply only.